


THERMAL LIFE CHARACTERISTICS OF VARIOUS ENAMELLED WIRES

Test Procedure ASTM D-2307

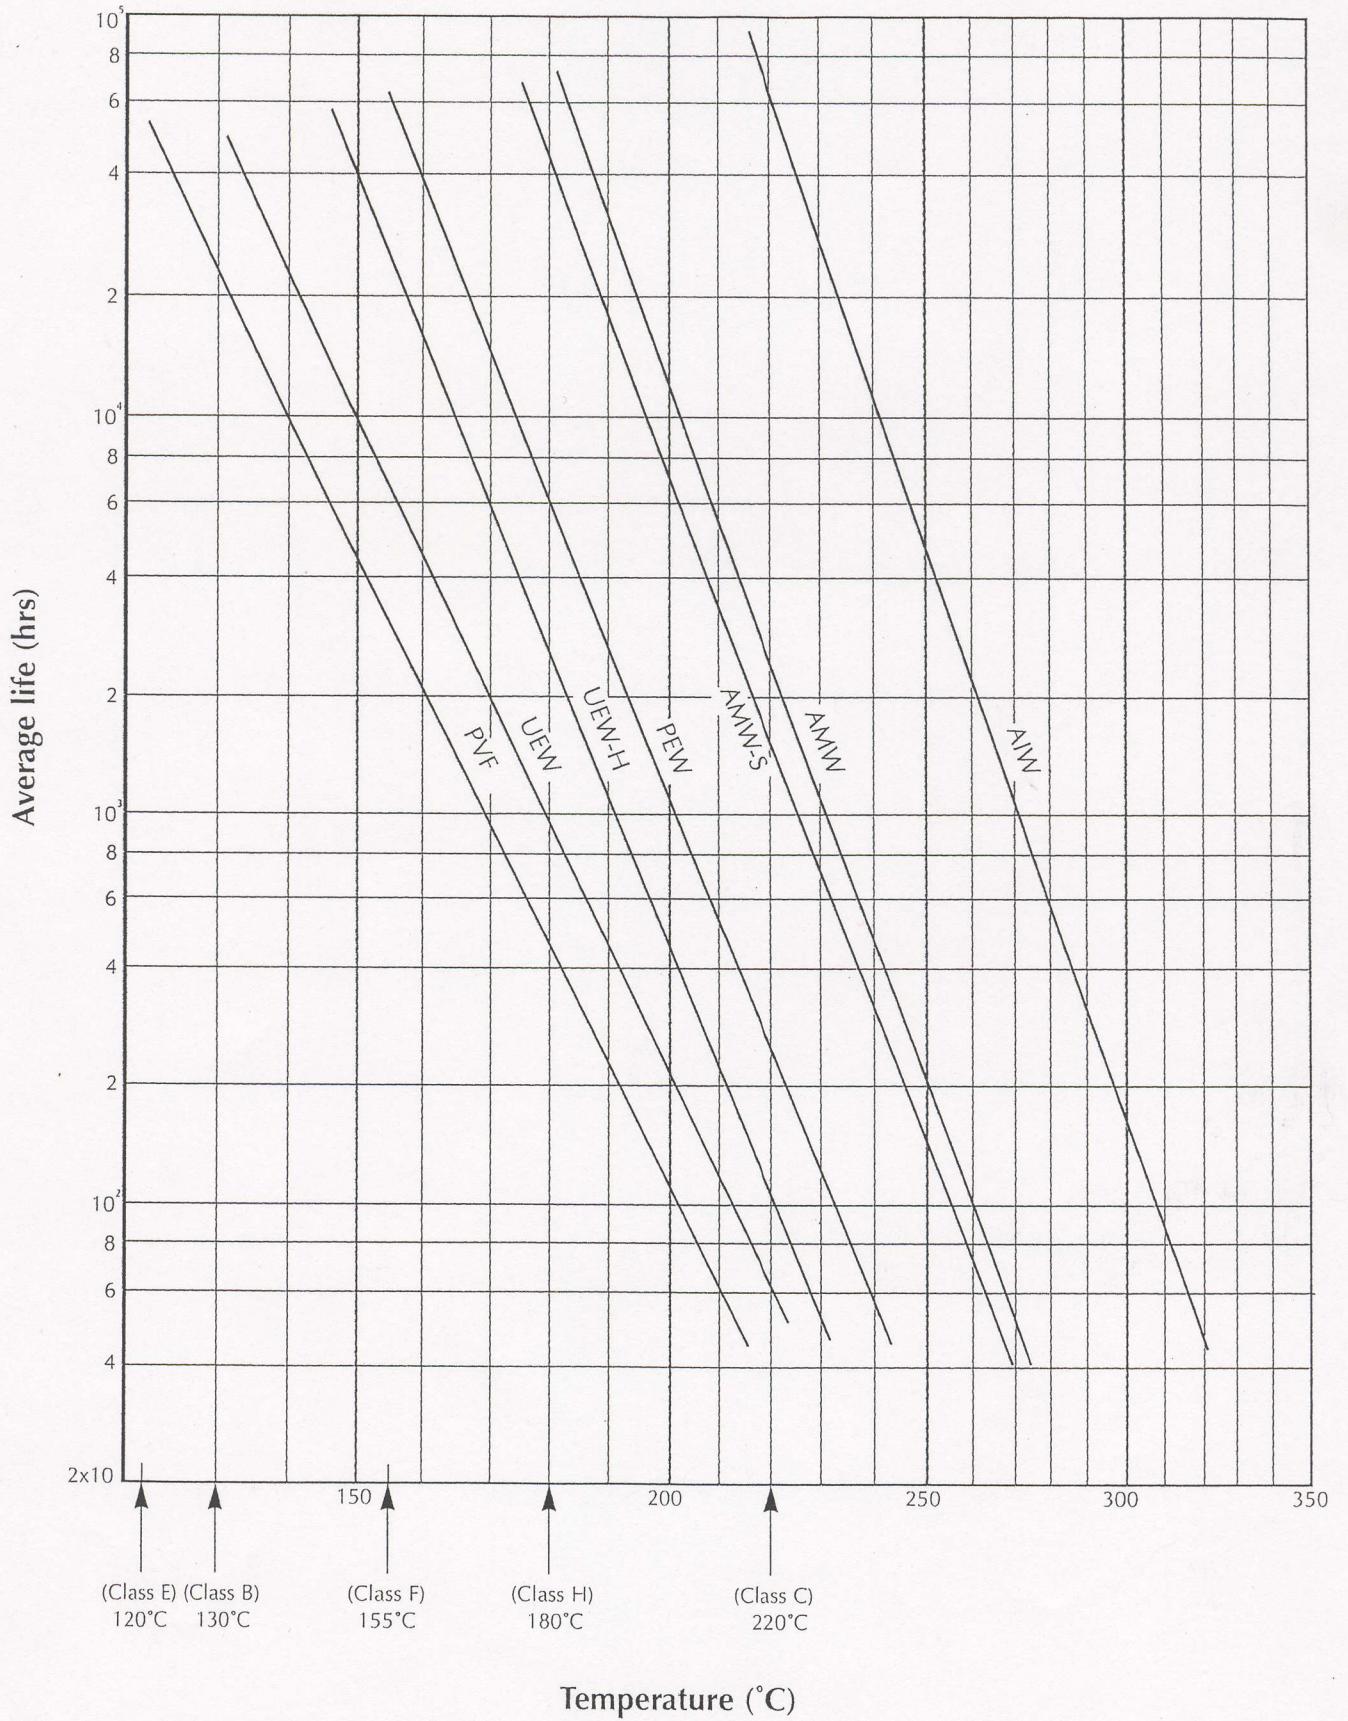

LEGEND

Enamel Code	Enamel Type	Temperature Rating	Enamel Code	Enamel Type	Temperature Rating
PVF	Polyvinyl Formal	120°C	AMW-S	Polyester-Imide Solderable	180°C
UEW	Polyurethane	UL130°C	AMW	Polyester-Imide	180°C
UEW-H	Polyurethane	155°C	AIW	Polyamide-Imide	220°C
PEW	Polyester	155°C			